

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/039785 A1

(51) International Patent Classification⁷: B05D 1/30. (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, BE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/NZ2004/000268

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 529183 28 October 2003 (28.10.2003) NZ

(71) Applicant (for all designated States except US): ECOGLO LIMITED [NZ/NZ]; Level 1, 387A Colombo Street, Christchurch_8002 (NZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WATSON, Julian, Mark [NZ/NZ]; 129 High Street, Leeston_8151 (NZ).

(74) Agents: WILSON, Kathryn, S. et al.; Level 11, 119 Armagh Street, P.O. Box 2201, Christchurch 8002 (NZ).


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF FORMING A SLIP-RESISTANT PHOTO-LUMINESCENT DEVICE

WO 2005/039785 A1

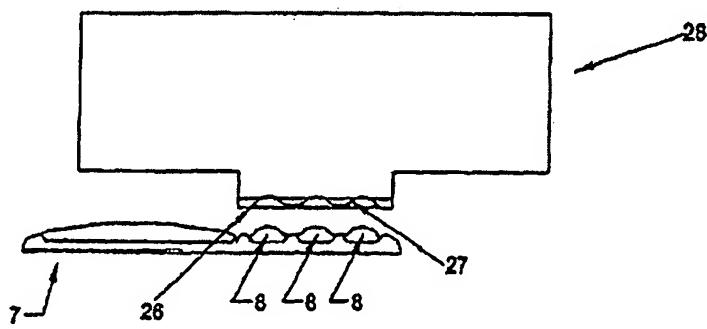

and second recesses (8, 13) for receiving traces of the first and second components that may spill from the adjacent recesses.

(57) Abstract: A method of manufacturing a slip-resistant photo-luminescent device includes dispensing first and second powdered components into respective recesses (8, 13) provided in a substrate (7) such as a metal strip. The first powdered component includes a resin and a friction enhancing material, the second powdered component includes a resin and a photo-luminescent pigment. The powdered components are then heated (4) to fuse the resins and bond them to surfaces of the respective recesses (8, 13). A channel (15) is formed between the first

and second recesses (8, 13) for receiving traces of the first and second components that may spill from the adjacent recesses.